

# Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	393.1 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	-4.0 degrees horizontal

Beam Spread	At 10% of Imax	149.6V x 149.8H
	At 50% of Imax	107.3V x 105.6H
	At 90% of Imax	47.9V x 40.2H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	974.8 lumens per klm.
	To 50% of Imax	743.7 lumens per klm.
	To 90% of Imax	186.6 lumens per klm.

Upward LOR	0.7 %
Downward LOR	99.3 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 180DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: DAMIN  
Test Date: 2026-06-16

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.490  
Humidity: 65.0%  
Test Distance: 8.555m [K=1.0000]  
Remarks:

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:23.998V I:0.0379A P:0.9095W PF:1.0000 Freq:50.00Hz Lamp Flux:15.2945x1 lm		
NAME: CD Dot DX60 RGBW Clear_R On	TYPE: PANEL	WEIGHT:
SPEC.: CD Dot DX60 RGBW Clear 24VDC,2.8W	DIM.: 0.064*0.045*0.02	SERIAL No.:
MFR.: Colordreamer Lighting	SUR.: 0.045	Shielding Angle:

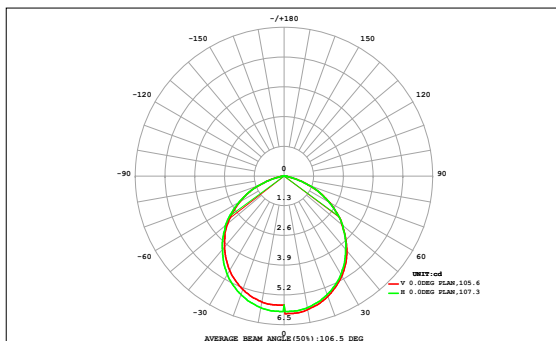

DATA OF LAMP		Eff:16.82lm/W	
MODEL	DC601204	Imax (cd)	6.012
NOMINAL POWER(W)	0.9	AVAILABILITY(%)	97.7
RATED VOLTAGE (V)	24	Avai. FLUX(lm)	14.94
NOMINAL FLUX(lm)	15.2945	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	15.29
TEST VOLTAGE (V)	24	θ @50% (H,V)	106,107DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70	80	90	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
80	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.12	0.06
70	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.39	0.37
60	0.00	0.00	0.01	0.02	0.03	0.05	0.07	0.08	0.08	0.08	0.08	0.07	0.05	0.03	0.02	0.01	0.00	0.00	0.68	0.67
50	0.00	0.00	0.01	0.03	0.05	0.07	0.09	0.11	0.11	0.11	0.11	0.09	0.07	0.05	0.03	0.01	0.00	0.00	0.94	0.93
40	0.00	0.00	0.02	0.04	0.06	0.09	0.11	0.13	0.14	0.14	0.13	0.11	0.09	0.06	0.04	0.02	0.00	0.00	1.16	1.15
30	0.00	0.00	0.02	0.04	0.07	0.10	0.13	0.15	0.16	0.16	0.15	0.13	0.10	0.07	0.04	0.02	0.00	0.00	1.33	1.33
20	0.00	0.00	0.02	0.05	0.08	0.11	0.14	0.16	0.17	0.17	0.16	0.13	0.11	0.08	0.05	0.02	0.00	0.00	1.45	1.45
10	0.00	0.01	0.02	0.05	0.08	0.12	0.15	0.17	0.18	0.18	0.16	0.14	0.11	0.08	0.05	0.02	0.01	0.00	1.51	1.50
0	0.00	0.01	0.02	0.05	0.08	0.12	0.15	0.17	0.18	0.18	0.16	0.14	0.11	0.08	0.05	0.02	0.01	0.00	1.51	1.50
-10	0.00	0.00	0.02	0.05	0.08	0.11	0.14	0.16	0.17	0.17	0.16	0.13	0.11	0.08	0.05	0.02	0.00	0.00	1.45	1.45
-20	0.00	0.00	0.02	0.04	0.07	0.10	0.13	0.15	0.16	0.16	0.15	0.13	0.10	0.07	0.04	0.02	0.00	0.00	1.33	1.33
-30	0.00	0.00	0.02	0.04	0.06	0.09	0.11	0.13	0.14	0.14	0.13	0.11	0.09	0.06	0.04	0.02	0.00	0.00	1.16	1.15
-40	0.00	0.00	0.01	0.03	0.05	0.07	0.09	0.11	0.11	0.11	0.11	0.09	0.07	0.05	0.03	0.01	0.00	0.00	0.94	0.93
-50	0.00	0.00	0.01	0.02	0.03	0.05	0.07	0.08	0.08	0.08	0.08	0.07	0.05	0.03	0.02	0.01	0.00	0.00	0.68	0.67
-60	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.39	0.37
-70	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.12	0.06
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90	
Φ t	0.00	0.04	0.19	0.46	0.80	1.15	1.46	1.70	1.83	1.82	1.68	1.44	1.13	0.78	0.46	0.19	0.04	0.00	15	---
Φ a	0.00	0.02	0.18	0.45	0.78	1.14	1.45	1.69	1.82	1.80	1.66	1.42	1.11	0.77	0.44	0.18	0.02	0.00	---	15

one-half-peak spread: U:49.9,D:49.9 , L:49.7,R:46.5


NEMA Beam Type: Type 7

C Range: 0 - 180DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:DAMIN  
Test Date:2026-06-16

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.490  
Humidity:65.0%  
Test Distance:8.555m [K=1.0000]  
Remarks:

### ISOCANDELA DIAGRAM

Test:U:23.998V I:0.0379A P:0.9095W PF:1.0000 Freq:50.00Hz Lamp Flux:15.2945x1 lm		
NAME: CD Dot DX60 RGBW Clear_R On	TYPE: PANEL	WEIGHT:
SPEC.: CD Dot DX60 RGBW Clear 24VDC,2.8W	DIM.: 0.064*0.045*0.02	SERIAL No.:
MFR.: Colordreamer Lighting	SUR.: 0.045	Shielding Angle:

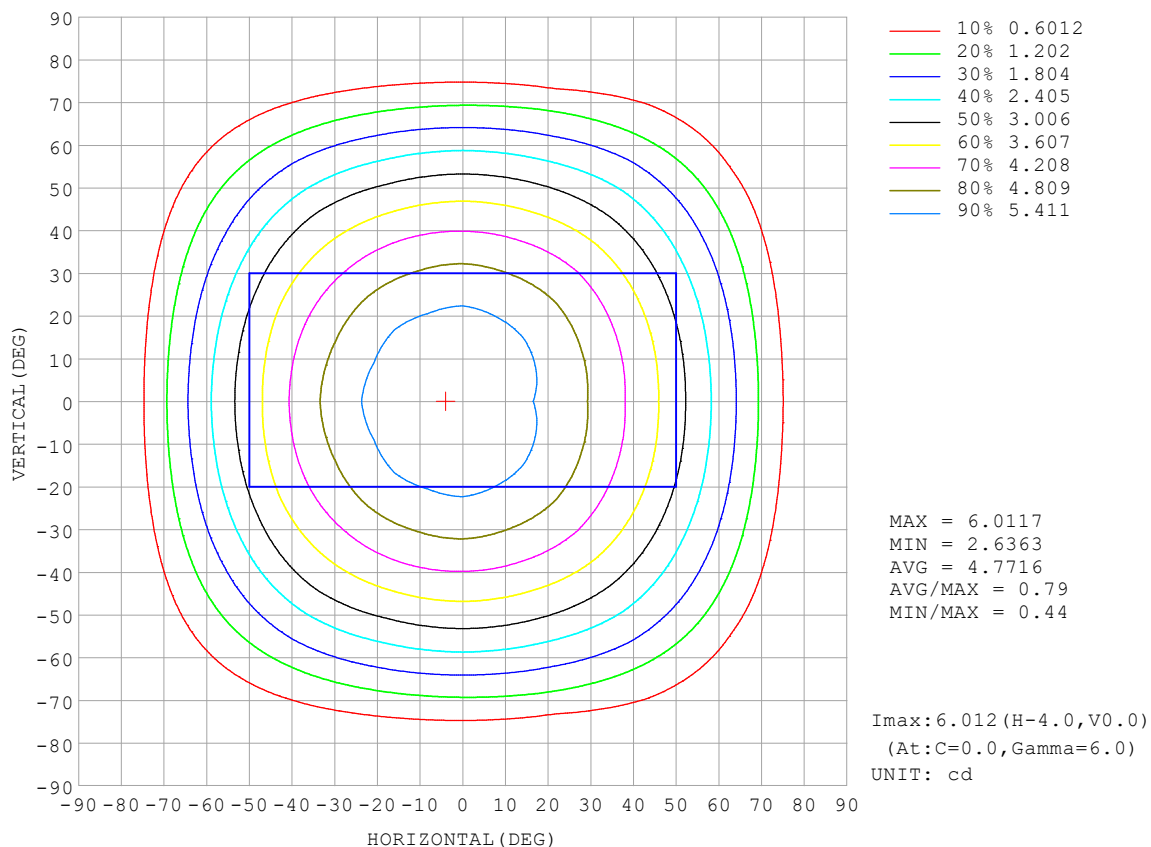


C Range: 0 - 180DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: DAMIN  
Test Date: 2026-06-16

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.490  
Humidity: 65.0%  
Test Distance: 8.555m [K=1.0000]  
Remarks:

### ISOLUX DIAGRAM


Test:U:23.998V I:0.0379A P:0.9095W PF:1.0000 Freq:50.00Hz Lamp Flux:15.2945x1 lm		
NAME: CD Dot DX60 RGBW Clear_R On	TYPE: PANEL	WEIGHT:
SPEC.: CD Dot DX60 RGBW Clear 24VDC,2.8W	DIM.: 0.064*0.045*0.02	SERIAL No.:
MFR.: Colordreamer Lighting	SUR.: 0.045	Shielding Angle:

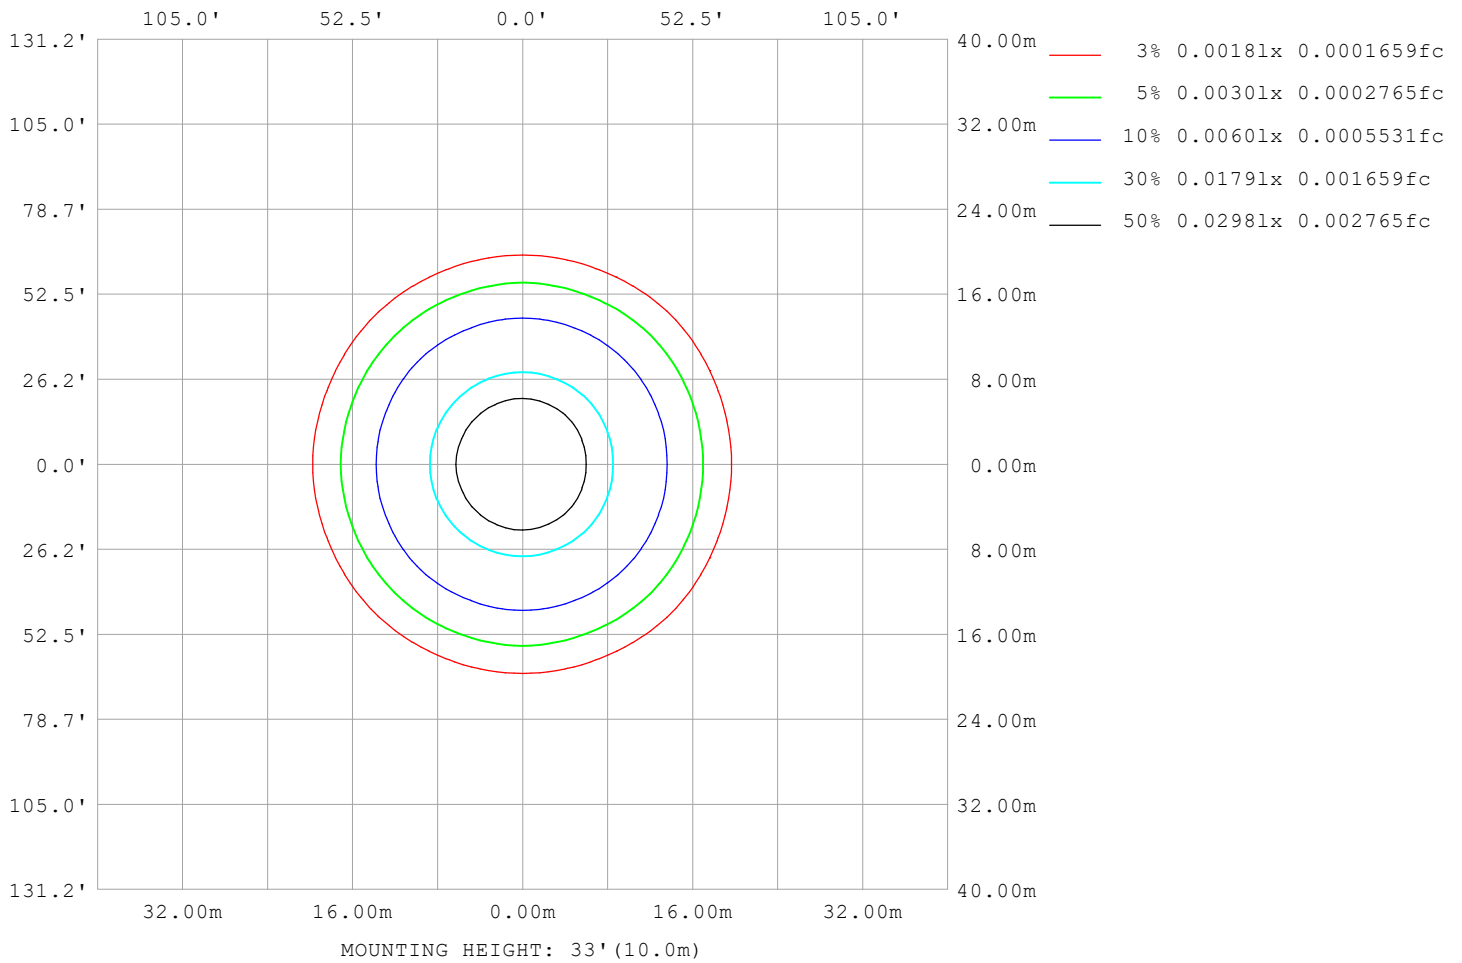

C Range: 0 - 180DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3°C  
Operators:DAMIN  
Test Date:2026-06-16

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.490  
Humidity:65.0%  
Test Distance:8.555m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

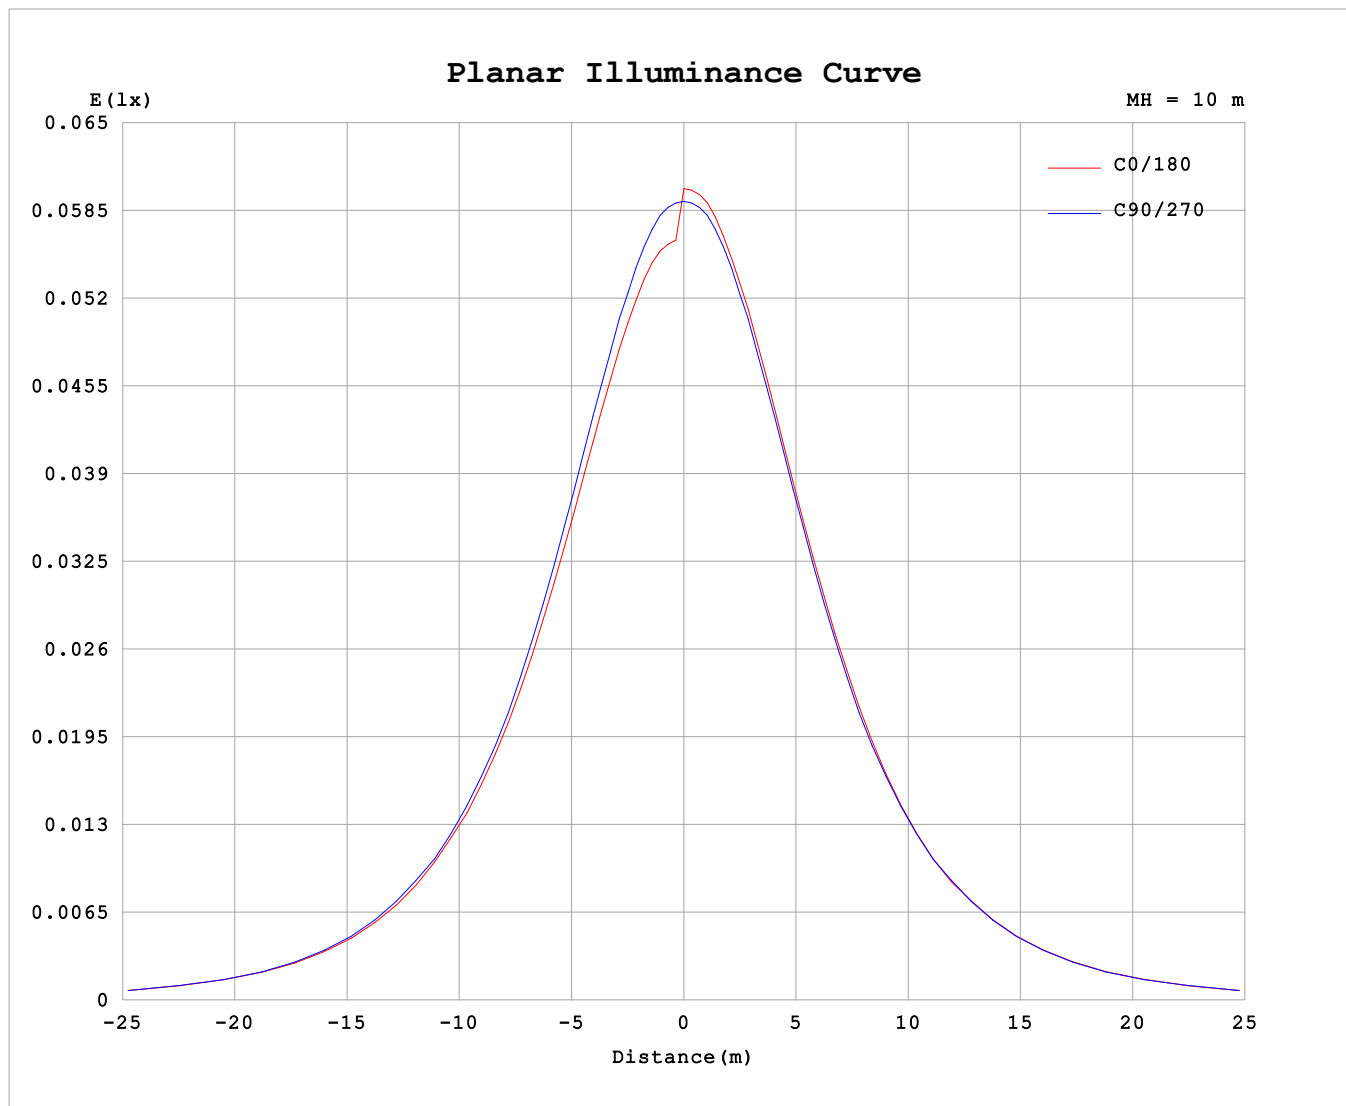


C Range: 0 - 180DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: DAMIN  
Test Date: 2026-06-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.490  
Humidity: 65.0%  
Test Distance: 8.555m [K=1.0000]  
Remarks:

### AAI Figure

Test:U:23.998V I:0.0379A P:0.9095W PF:1.0000 Freq:50.00Hz Lamp Flux:15.2945x1 lm		
NAME: CD Dot DX60 RGBW Clear_R On	TYPE: PANEL	WEIGHT:
SPEC.: CD Dot DX60 RGBW Clear 24VDC,2.8W	DIM.: 0.064*0.045*0.02	SERIAL No.:
MFR.: Colordreamer Lighting	SUR.: 0.045	Shielding Angle:

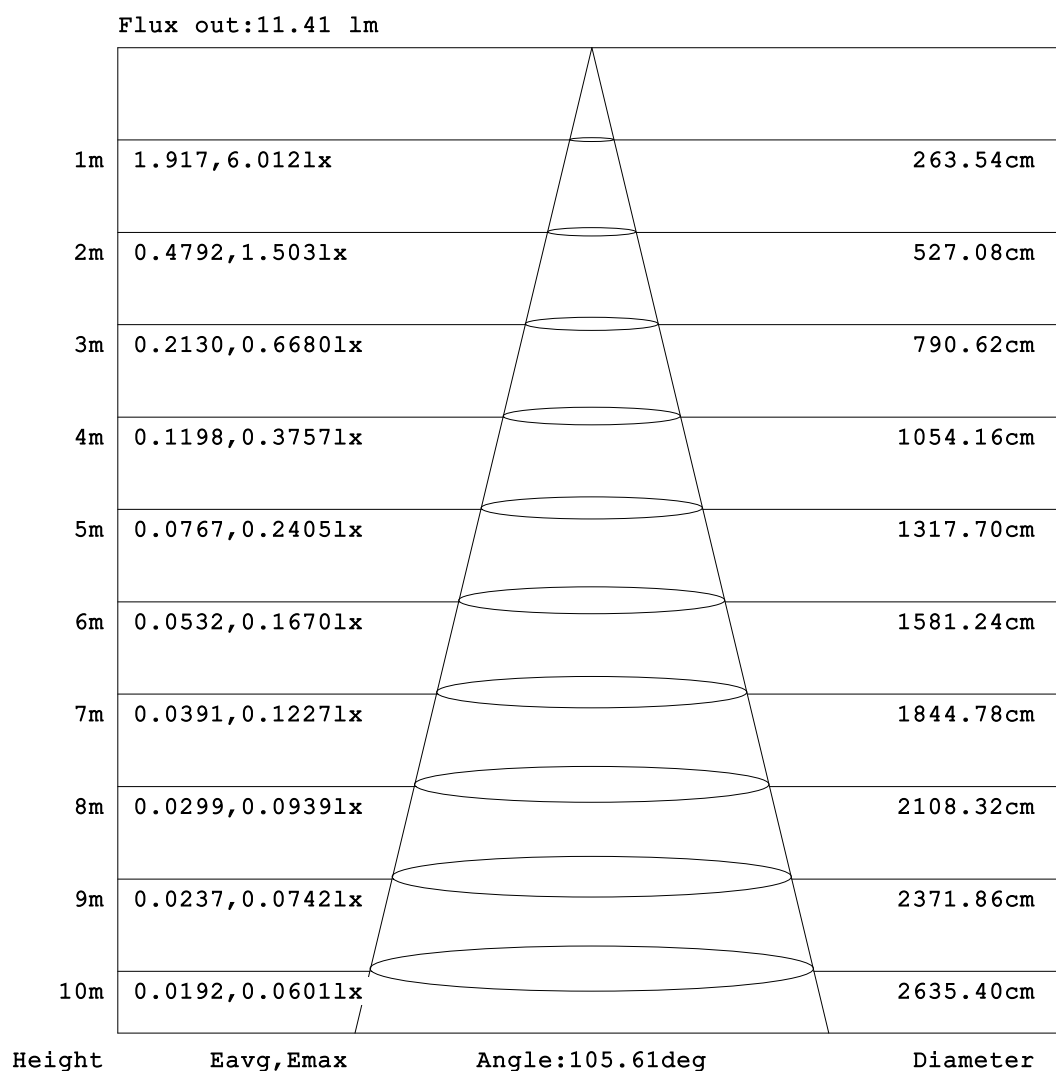

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 180DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3°C  
Operators:DAMIN  
Test Date:2026-06-16

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.490  
Humidity:65.0%  
Test Distance:8.555m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:23.998V I:0.0379A P:0.9095W PF:1.0000 Freq:50.00Hz Lamp Flux:15.2945x1 lm		
NAME: CD Dot DX60 RGBW Clear_R On	TYPE: PANEL	WEIGHT:
SPEC.: CD Dot DX60 RGBW Clear 24VDC,2.8W	DIM.: 0.064*0.045*0.02	SERIAL No.:
MFR.: Colordreamer Lighting	SUR.: 0.045	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
-170	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01
-160	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01
-150	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01
-140	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01
-130	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01
-120	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01
-110	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01
-100	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
-90	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
-80	0.02	0.03	0.03	0.02	0.02	0.02	0.03	0.04	0.05	0.07	0.07	0.07	0.08	0.09	0.10	0.12	0.13	0.14	0.15
-70	0.02	0.03	0.03	0.03	0.03	0.05	0.13	0.24	0.34	0.45	0.60	0.72	0.79	0.82	0.90	0.99	1.05	1.09	1.10
-60	0.02	0.03	0.04	0.05	0.13	0.28	0.50	0.77	0.98	1.19	1.44	1.64	1.79	1.92	2.03	2.12	2.19	2.24	2.26
-50	0.02	0.03	0.05	0.13	0.33	0.68	0.96	1.32	1.65	1.94	2.20	2.47	2.70	2.88	3.03	3.15	3.24	3.31	3.35
-40	0.02	0.04	0.07	0.24	0.60	0.98	1.43	1.82	2.20	2.58	2.95	3.25	3.47	3.70	3.86	4.01	4.12	4.18	4.20
-30	0.02	0.04	0.11	0.37	0.82	1.30	1.78	2.23	2.68	3.13	3.49	3.83	4.11	4.37	4.59	4.74	4.86	4.94	4.97
-20	0.02	0.04	0.15	0.48	0.98	1.53	2.05	2.55	3.06	3.50	3.92	4.28	4.60	4.88	5.14	5.30	5.41	5.48	5.51
-10	0.02	0.05	0.18	0.55	1.08	1.68	2.22	2.75	3.26	3.73	4.17	4.57	4.91	5.19	5.43	5.64	5.78	5.82	5.85
0	0.02	0.05	0.19	0.58	1.11	1.73	2.28	2.82	3.31	3.80	4.27	4.69	5.05	5.34	5.60	5.79	5.93	6.01	5.64
10	0.02	0.05	0.18	0.55	1.08	1.68	2.22	2.75	3.26	3.73	4.17	4.57	4.91	5.19	5.43	5.64	5.78	5.82	5.85
20	0.02	0.04	0.15	0.48	0.98	1.53	2.05	2.55	3.06	3.50	3.92	4.28	4.60	4.88	5.14	5.30	5.41	5.48	5.51
30	0.02	0.04	0.11	0.37	0.82	1.30	1.78	2.23	2.68	3.13	3.49	3.83	4.11	4.37	4.59	4.74	4.86	4.94	4.97
40	0.02	0.04	0.07	0.24	0.60	0.98	1.43	1.82	2.20	2.58	2.95	3.25	3.47	3.70	3.86	4.01	4.12	4.18	4.20
50	0.02	0.03	0.05	0.13	0.33	0.68	0.96	1.32	1.65	1.94	2.20	2.47	2.70	2.88	3.03	3.15	3.24	3.31	3.35
60	0.02	0.03	0.04	0.05	0.13	0.28	0.50	0.77	0.98	1.19	1.44	1.64	1.79	1.92	2.03	2.12	2.19	2.24	2.26
70	0.02	0.03	0.03	0.03	0.03	0.05	0.13	0.24	0.34	0.45	0.60	0.72	0.79	0.82	0.90	0.99	1.05	1.09	1.10
80	0.02	0.03	0.03	0.02	0.02	0.02	0.03	0.04	0.05	0.07	0.07	0.07	0.08	0.09	0.10	0.12	0.13	0.14	0.15
90	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
100	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
110	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01
120	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01
130	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01
140	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01
150	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01
160	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01
170	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01
180	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02

C Range: 0 - 180DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:DAMIN  
Test Date:2026-06-16

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.490  
Humidity:65.0%  
Test Distance:8.555m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:23.998V I:0.0379A P:0.9095W PF:1.0000 Freq:50.00Hz Lamp Flux:15.2945x1 lm		
NAME: CD Dot DX60 RGBW Clear_R On	TYPE: PANEL	WEIGHT:
SPEC.: CD Dot DX60 RGBW Clear 24VDC,2.8W	DIM.: 0.064*0.045*0.02	SERIAL No.:
MFR.: Colordreamer Lighting	SUR.: 0.045	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
-170	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
-160	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
-150	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
-140	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
-130	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
-120	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
-110	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
-100	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
-90	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
-80	0.15	0.14	0.13	0.11	0.10	0.09	0.07	0.06	0.06	0.05	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
-70	1.10	1.08	1.03	0.97	0.88	0.79	0.72	0.64	0.52	0.38	0.27	0.15	0.08	0.04	0.03	0.03	0.03	0.02	
-60	2.24	2.19	2.12	2.03	1.93	1.80	1.65	1.46	1.22	0.96	0.75	0.53	0.35	0.15	0.07	0.03	0.03	0.02	
-50	3.32	3.25	3.15	3.02	2.86	2.67	2.46	2.23	1.96	1.66	1.32	0.97	0.64	0.38	0.16	0.05	0.03	0.02	
-40	4.17	4.10	3.98	3.84	3.67	3.46	3.20	2.88	2.54	2.19	1.83	1.42	0.98	0.60	0.28	0.08	0.04	0.02	
-30	4.92	4.82	4.69	4.52	4.31	4.05	3.75	3.42	3.05	2.64	2.21	1.78	1.29	0.80	0.40	0.13	0.04	0.02	
-20	5.46	5.35	5.20	5.01	4.76	4.47	4.15	3.77	3.41	2.97	2.50	2.02	1.53	0.96	0.50	0.17	0.04	0.02	
-10	5.75	5.66	5.47	5.26	5.00	4.71	4.37	4.00	3.63	3.17	2.68	2.17	1.66	1.08	0.58	0.20	0.05	0.02	
0	5.64	5.59	5.46	5.28	5.04	4.76	4.43	4.06	3.66	3.22	2.73	2.22	1.71	1.11	0.61	0.22	0.05	0.02	
10	5.75	5.66	5.47	5.26	5.00	4.71	4.37	4.00	3.63	3.17	2.68	2.17	1.66	1.08	0.58	0.20	0.05	0.02	
20	5.46	5.35	5.20	5.01	4.76	4.47	4.15	3.77	3.41	2.97	2.50	2.02	1.53	0.96	0.50	0.17	0.04	0.02	
30	4.92	4.82	4.69	4.52	4.31	4.05	3.75	3.42	3.05	2.64	2.21	1.78	1.29	0.80	0.40	0.13	0.04	0.02	
40	4.17	4.10	3.98	3.84	3.67	3.46	3.20	2.88	2.54	2.19	1.83	1.42	0.98	0.60	0.28	0.08	0.04	0.02	
50	3.32	3.25	3.15	3.02	2.86	2.67	2.46	2.23	1.96	1.66	1.32	0.97	0.64	0.38	0.16	0.05	0.03	0.02	
60	2.24	2.19	2.12	2.03	1.93	1.80	1.65	1.46	1.22	0.96	0.75	0.53	0.35	0.15	0.07	0.03	0.03	0.02	
70	1.10	1.08	1.03	0.97	0.88	0.79	0.72	0.64	0.52	0.38	0.27	0.15	0.08	0.04	0.03	0.03	0.03	0.02	
80	0.15	0.14	0.13	0.11	0.10	0.09	0.07	0.06	0.06	0.05	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
90	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
100	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
110	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
120	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
130	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
140	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
150	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
160	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
170	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
180	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	

C Range: 0 - 180DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:DAMIN  
Test Date:2026-06-16

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.490  
Humidity:65.0%  
Test Distance:8.555m [K=1.0000]  
Remarks: