

# Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	203.2 cd per klm.
(Luminaire orientation as tested.)	-14.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	214.1V x 180.0H
	At 50% of Imax	159.2V x 158.4H
	At 90% of Imax	69.3V x 68.0H

Beam Flux	Total	999.8 lumens per klm.
	To 10% of Imax	984.8 lumens per klm.
	To 50% of Imax	748.3 lumens per klm.
	To 90% of Imax	182.8 lumens per klm.

Upward LOR	13.6 %
Downward LOR	86.4 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 180DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: DAMIN  
Test Date: 2026-04-08

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.490  
Humidity: 65.0%  
Test Distance: 8.555m [K=1.0000]  
Remarks:

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:23.998V I:0.0384A P:0.9215W PF:1.0000 Freq:50.00Hz Lamp Flux:6.38747x1 lm		
NAME: DMX Dot RGBW-B	TYPE:	WEIGHT:
SPEC.: 60mm D,12pcs RGBW,160Degree	DIM.: 0.058*0.05*0.031.15M	SERIAL No.:
MFR.: Colordreamer Lighting	SUR.: 0.06	Shielding Angle:

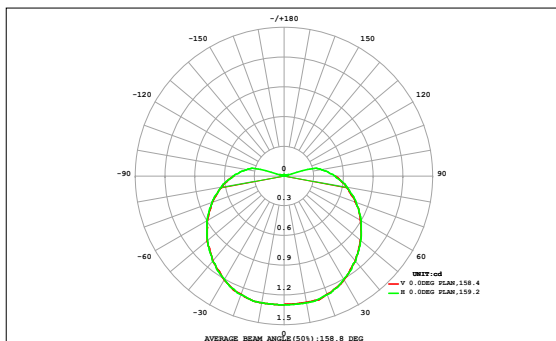

DATA OF LAMP		Eff:6.93lm/W	
MODEL	DM601204	Imax (cd)	1.298
NOMINAL POWER(W)	0.919	AVAILABILITY(%)	98.4
RATED VOLTAGE (V)	24	Avai. FLUX(lm)	6.286
NOMINAL FLUX(lm)	6.38747	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	6.387
TEST VOLTAGE (V)	24	θ @50% (H,V)	158,159DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a	
	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.19	0.19	
90	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.22	0.22	
80	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.26	0.26
70	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.29	0.29	
60	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.32	0.32	
50	0.00	0.01	0.01	0.01	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.01	0.01	0.01	0.00	0.34	0.34	
40	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.37	0.37	
30	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.38	0.38	
-30	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.39	0.39	
	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.39	0.39	
	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.38	0.38	
	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.37	0.37	
	0.00	0.01	0.01	0.01	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.01	0.01	0.01	0.00	0.34	0.34	
-40	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.32	0.32	
-50	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.29	0.29	
-60	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.26	0.26	
-70	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.22	0.22	
-80	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.19	0.19	
-90	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)				20	30	40	50	60	70	80	90	
Φ t	0.03	0.09	0.16	0.24	0.32	0.40	0.46	0.51	0.54	0.54	0.51	0.46	0.40	0.32	0.24	0.16	0.09	0.03	6	---	
Φ a	0.03	0.09	0.16	0.24	0.32	0.40	0.46	0.51	0.54	0.54	0.51	0.46	0.40	0.32	0.24	0.16	0.09	0.03	---	6	

one-half-peak spread: U:66.1,D:66.1 , L:63.7,R:65.5


NEMA Beam Type: Type 7

C Range: 0 - 180DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:DAMIN  
Test Date:2026-04-08

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.490  
Humidity:65.0%  
Test Distance:8.555m [K=1.0000]  
Remarks:

# ISOCANDELA DIAGRAM

Test:U:23.998V I:0.0384A P:0.9215W PF:1.0000 Freq:50.00Hz Lamp Flux:6.38747x1 lm		
NAME: DMX Dot RGBW-B	TYPE:	WEIGHT:
SPEC.: 60mm D,12pcs RGBW,160Degree	DIM.: 0.058*0.05*0.031.15M	SERIAL No.:
MFR.: Colordreamer Lighting	SUR.: 0.06	Shielding Angle:

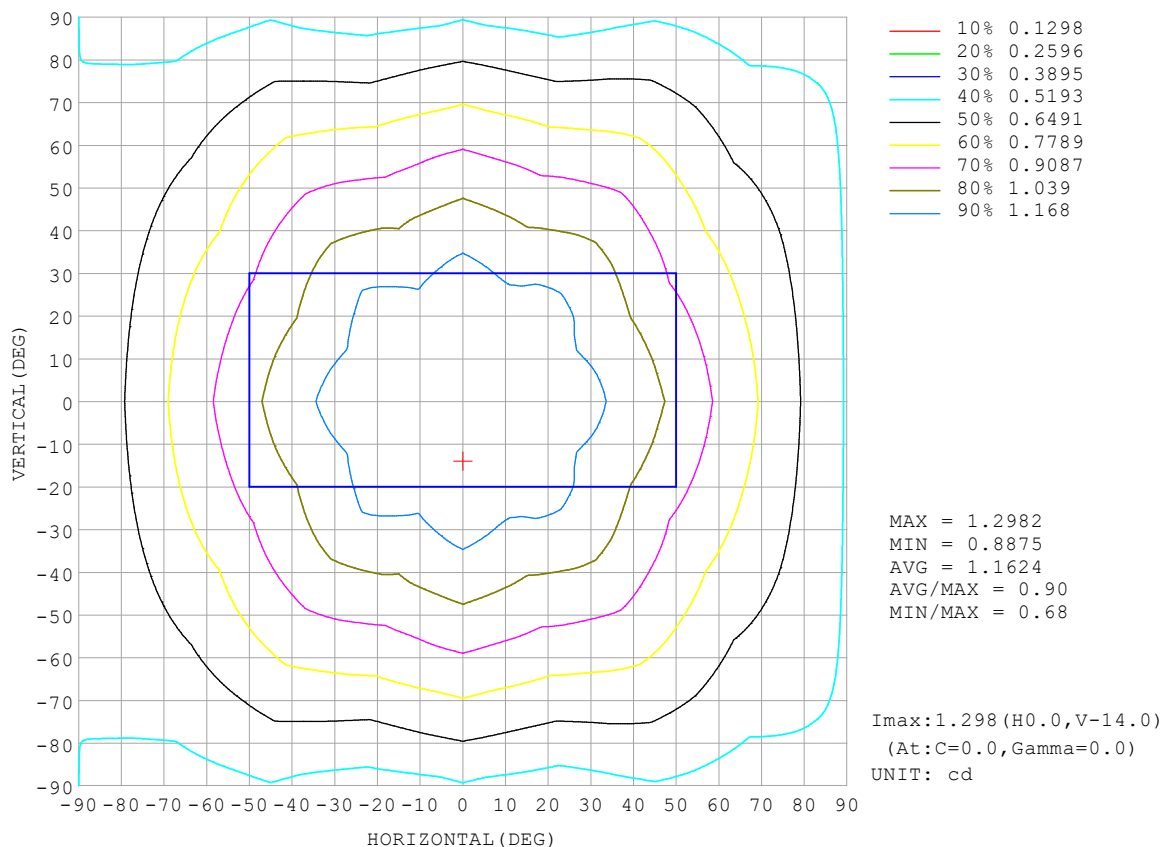


C Range: 0 - 180DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:DAMIN  
Test Date:2026-04-08

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.490  
Humidity:65.0%  
Test Distance:8.555m [K=1.0000]  
Remarks:

### ISOLUX DIAGRAM


Test:U:23.998V I:0.0384A P:0.9215W PF:1.0000 Freq:50.00Hz Lamp Flux:6.38747x1 lm		
NAME: DMX Dot RGBW-B	TYPE:	WEIGHT:
SPEC.: 60mm D,12pcs RGBW,160Degree	DIM.: 0.058*0.05*0.031.15M	SERIAL No.:
MFR.: Colordreamer Lighting	SUR.: 0.06	Shielding Angle:

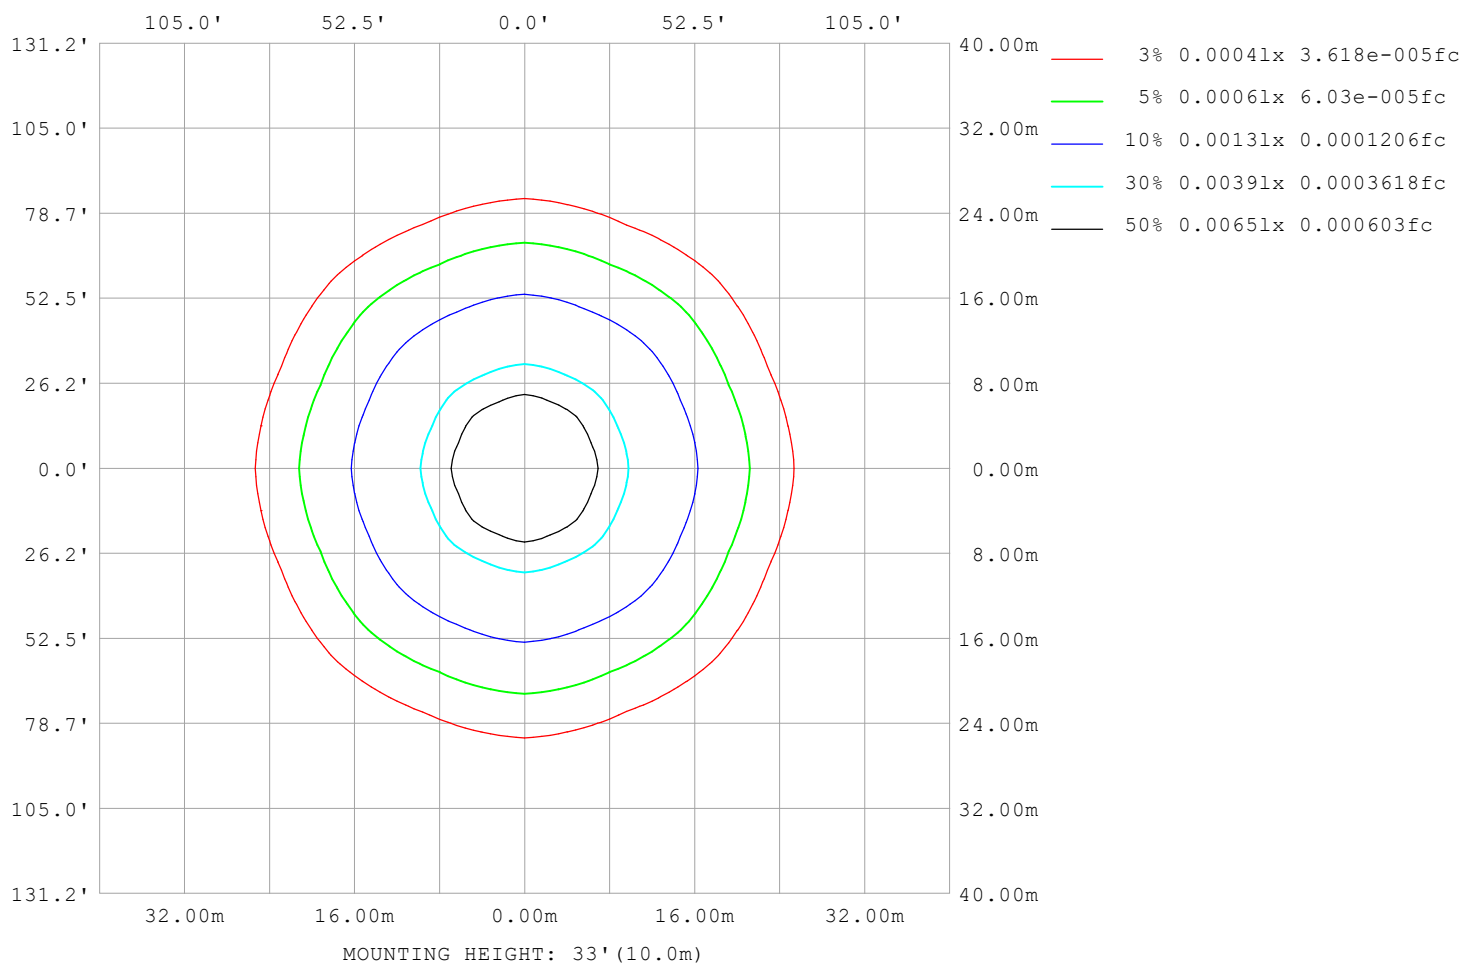

C Range: 0 - 180DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3°C  
Operators:DAMIN  
Test Date:2026-04-08

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.490  
Humidity:65.0%  
Test Distance:8.555m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

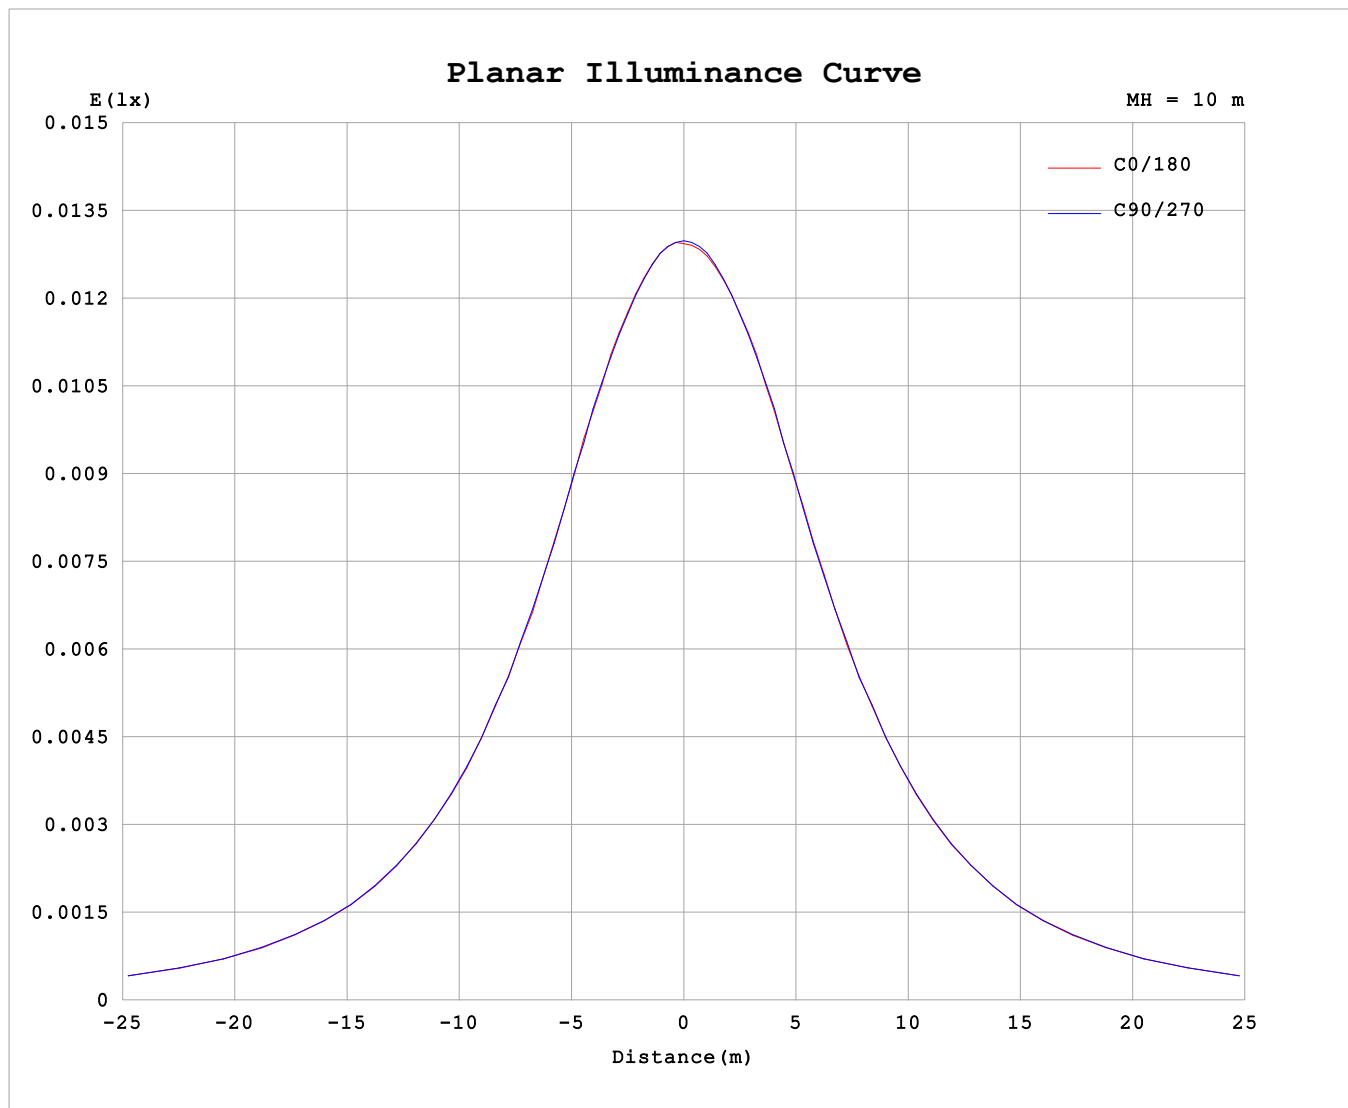


C Range: 0 - 180DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: DAMIN  
Test Date: 2026-04-08

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 2.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.490  
Humidity: 65.0%  
Test Distance: 8.555m [K=1.0000]  
Remarks:

AAI Figure

Test:U:23.998V I:0.0384A P:0.9215W PF:1.0000 Freq:50.00Hz Lamp Flux:6.38747x1 lm		
NAME: DMX Dot RGBW-B	TYPE:	WEIGHT:
SPEC.: 60mm D,12pcs RGBW,160Degree	DIM.: 0.058*0.05*0.031.15M	SERIAL No.:
MFR.: Colordreamer Lighting	SUR.: 0.06	Shielding Angle:

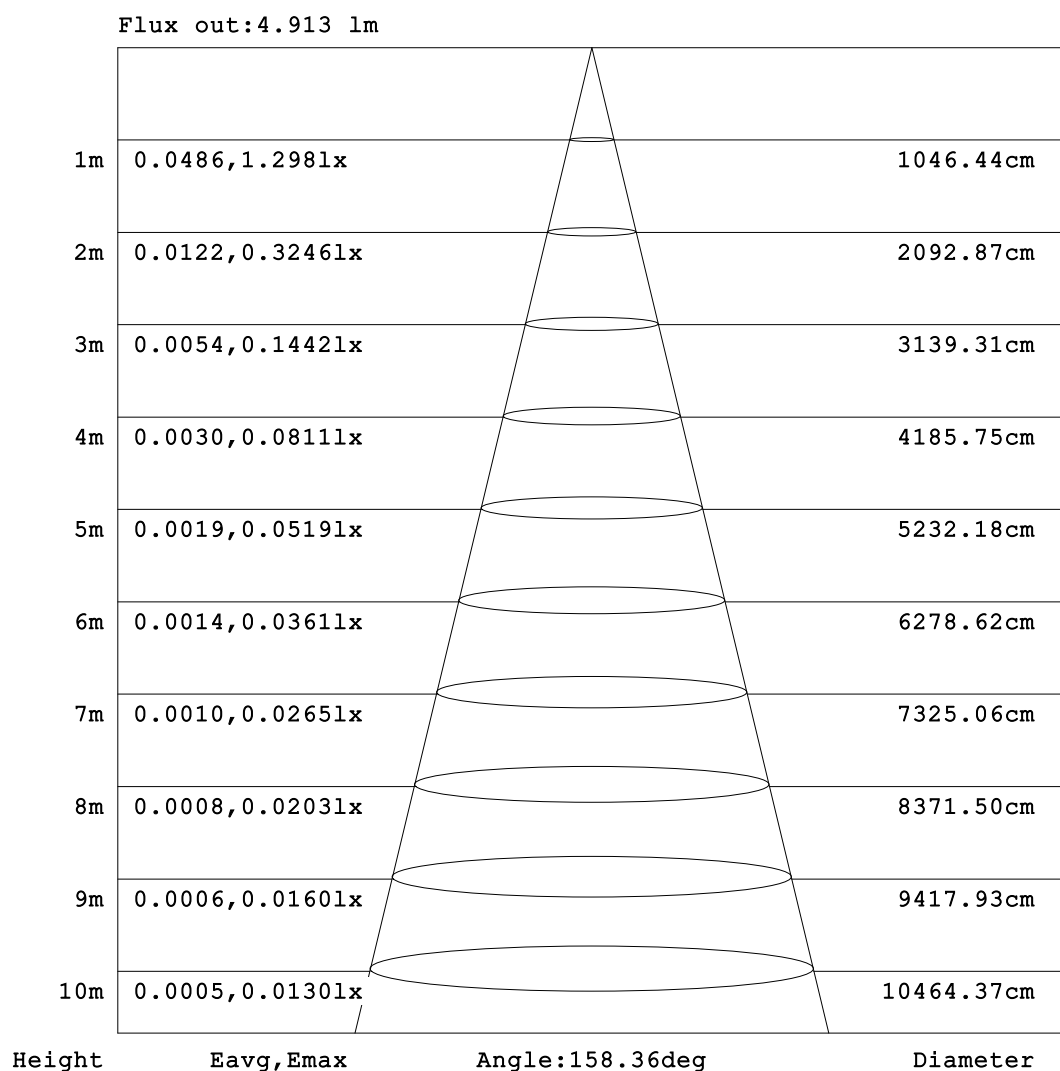

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 180DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:DAMIN  
Test Date:2026-04-08

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.490  
Humidity:65.0%  
Test Distance:8.555m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:23.998V I:0.0384A P:0.9215W PF:1.0000 Freq:50.00Hz Lamp Flux:6.38747x1 lm		
NAME: DMX Dot RGBW-B	TYPE:	WEIGHT:
SPEC.: 60mm D,12pcs RGBW,160Degree	DIM.: 0.058*0.05*0.031.15M	SERIAL No.:
MFR.: Colordreamer Lighting	SUR.: 0.06	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.52	0.45	0.38	0.32	0.25	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
-170	0.52	0.45	0.38	0.32	0.25	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01
-160	0.52	0.45	0.38	0.32	0.26	0.06	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01
-150	0.52	0.45	0.39	0.33	0.27	0.14	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01
-140	0.52	0.46	0.40	0.34	0.29	0.24	0.12	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01
-130	0.52	0.46	0.42	0.36	0.31	0.28	0.23	0.17	0.08	0.04	0.03	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01
-120	0.52	0.47	0.43	0.39	0.35	0.31	0.29	0.26	0.23	0.19	0.14	0.08	0.04	0.02	0.02	0.02	0.02	0.02	0.02
-110	0.52	0.48	0.45	0.42	0.39	0.36	0.35	0.34	0.33	0.32	0.29	0.25	0.21	0.16	0.11	0.07	0.05	0.04	0.02
-100	0.52	0.49	0.46	0.45	0.43	0.42	0.42	0.42	0.42	0.42	0.40	0.39	0.37	0.35	0.35	0.35	0.36	0.37	0.38
-90	0.52	0.51	0.49	0.48	0.47	0.47	0.48	0.49	0.50	0.51	0.50	0.49	0.48	0.47	0.47	0.48	0.49	0.50	0.51
-80	0.52	0.52	0.52	0.52	0.52	0.53	0.54	0.56	0.58	0.60	0.60	0.60	0.59	0.59	0.59	0.60	0.62	0.63	0.64
-70	0.52	0.53	0.54	0.55	0.56	0.57	0.60	0.63	0.66	0.69	0.70	0.71	0.71	0.71	0.71	0.73	0.74	0.76	0.77
-60	0.52	0.54	0.56	0.58	0.60	0.62	0.66	0.70	0.73	0.77	0.80	0.81	0.82	0.82	0.82	0.84	0.87	0.88	0.90
-50	0.52	0.55	0.58	0.61	0.64	0.67	0.71	0.75	0.80	0.84	0.88	0.90	0.92	0.93	0.94	0.95	0.97	0.99	1.01
-40	0.52	0.56	0.60	0.64	0.67	0.72	0.76	0.80	0.85	0.90	0.95	0.99	1.01	1.03	1.04	1.04	1.08	1.10	1.12
-30	0.52	0.56	0.61	0.66	0.71	0.76	0.80	0.85	0.89	0.94	0.99	1.04	1.10	1.13	1.14	1.14	1.15	1.18	1.20
-20	0.52	0.57	0.63	0.68	0.74	0.79	0.85	0.89	0.94	0.98	1.02	1.08	1.13	1.17	1.22	1.23	1.22	1.24	1.27
-10	0.52	0.57	0.63	0.69	0.75	0.82	0.87	0.93	0.98	1.03	1.08	1.12	1.16	1.19	1.22	1.25	1.30	1.27	1.30
0	0.52	0.58	0.64	0.70	0.76	0.83	0.89	0.95	1.00	1.06	1.12	1.16	1.21	1.24	1.27	1.30	1.29	1.29	1.30
10	0.52	0.57	0.63	0.69	0.75	0.82	0.87	0.93	0.98	1.03	1.08	1.12	1.16	1.19	1.22	1.25	1.30	1.27	1.30
20	0.52	0.57	0.63	0.68	0.74	0.79	0.85	0.89	0.94	0.98	1.02	1.08	1.13	1.17	1.22	1.23	1.22	1.24	1.27
30	0.52	0.56	0.61	0.66	0.71	0.76	0.80	0.85	0.89	0.94	0.99	1.04	1.10	1.13	1.14	1.14	1.15	1.18	1.20
40	0.52	0.56	0.60	0.64	0.67	0.72	0.76	0.80	0.85	0.90	0.95	0.99	1.01	1.03	1.04	1.04	1.08	1.10	1.12
50	0.52	0.55	0.58	0.61	0.64	0.67	0.71	0.75	0.80	0.84	0.88	0.90	0.92	0.93	0.94	0.95	0.97	0.99	1.01
60	0.52	0.54	0.56	0.58	0.60	0.62	0.66	0.70	0.73	0.77	0.80	0.81	0.82	0.82	0.82	0.84	0.87	0.88	0.90
70	0.52	0.53	0.54	0.55	0.56	0.57	0.60	0.63	0.66	0.69	0.70	0.71	0.71	0.71	0.71	0.73	0.74	0.76	0.77
80	0.52	0.52	0.52	0.52	0.52	0.53	0.54	0.56	0.58	0.60	0.60	0.60	0.59	0.59	0.59	0.60	0.62	0.63	0.64
90	0.52	0.51	0.49	0.48	0.47	0.47	0.48	0.49	0.50	0.51	0.50	0.49	0.48	0.47	0.47	0.48	0.49	0.50	0.51
100	0.52	0.49	0.46	0.45	0.43	0.42	0.42	0.42	0.42	0.42	0.40	0.39	0.37	0.35	0.35	0.35	0.36	0.37	0.38
110	0.52	0.48	0.45	0.42	0.39	0.36	0.35	0.34	0.33	0.32	0.29	0.25	0.21	0.16	0.11	0.07	0.05	0.04	0.02
120	0.52	0.47	0.43	0.39	0.35	0.31	0.29	0.26	0.23	0.19	0.14	0.08	0.04	0.02	0.02	0.02	0.02	0.02	0.02
130	0.52	0.46	0.42	0.36	0.31	0.28	0.23	0.17	0.08	0.04	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01
140	0.52	0.46	0.40	0.34	0.29	0.24	0.12	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01
150	0.52	0.45	0.39	0.33	0.27	0.14	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01
160	0.52	0.45	0.38	0.32	0.26	0.06	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01
170	0.52	0.45	0.38	0.32	0.25	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01
180	0.52	0.45	0.38	0.32	0.25	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02

C Range: 0 - 180DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:DAMIN  
Test Date:2026-04-08

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.490  
Humidity:65.0%  
Test Distance:8.555m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:23.998V I:0.0384A P:0.9215W PF:1.0000 Freq:50.00Hz Lamp Flux:6.38747x1 lm		
NAME: DMX Dot RGBW-B	TYPE:	WEIGHT:
SPEC.: 60mm D,12pcs RGBW,160Degree	DIM.: 0.058*0.05*0.031.15M	SERIAL No.:
MFR.: Colordreamer Lighting	SUR.: 0.06	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.26	0.32	0.38	0.44	0.51	
-170	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.26	0.31	0.38	0.44	0.51	
-160	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.07	0.26	0.32	0.39	0.44	0.51	
-150	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.16	0.27	0.33	0.39	0.45	0.51	
-140	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.10	0.24	0.29	0.34	0.40	0.45	0.51	
-130	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.03	0.04	0.06	0.14	0.23	0.27	0.32	0.37	0.41	0.46	0.51	
-120	0.02	0.02	0.02	0.02	0.02	0.05	0.08	0.14	0.18	0.23	0.26	0.29	0.31	0.36	0.39	0.42	0.47	0.51	
-110	0.04	0.05	0.08	0.12	0.17	0.22	0.26	0.30	0.32	0.33	0.34	0.36	0.37	0.38	0.41	0.45	0.48	0.51	
-100	0.37	0.37	0.36	0.35	0.36	0.37	0.39	0.40	0.42	0.41	0.41	0.41	0.41	0.43	0.45	0.47	0.49	0.51	
-90	0.50	0.49	0.48	0.47	0.47	0.48	0.49	0.50	0.51	0.50	0.49	0.48	0.47	0.47	0.48	0.49	0.50	0.51	
-80	0.63	0.62	0.61	0.59	0.59	0.59	0.60	0.60	0.60	0.58	0.56	0.54	0.52	0.51	0.51	0.51	0.51	0.51	
-70	0.76	0.75	0.73	0.71	0.71	0.70	0.70	0.70	0.69	0.66	0.64	0.60	0.57	0.56	0.55	0.54	0.52	0.51	
-60	0.88	0.86	0.84	0.82	0.82	0.82	0.81	0.80	0.77	0.73	0.69	0.66	0.63	0.60	0.58	0.56	0.53	0.51	
-50	0.99	0.97	0.95	0.94	0.93	0.92	0.91	0.88	0.84	0.80	0.75	0.71	0.67	0.64	0.61	0.58	0.54	0.51	
-40	1.10	1.08	1.05	1.04	1.03	1.01	0.99	0.94	0.90	0.85	0.80	0.75	0.72	0.68	0.64	0.60	0.55	0.51	
-30	1.18	1.15	1.14	1.14	1.13	1.09	1.04	0.99	0.94	0.89	0.85	0.80	0.76	0.71	0.66	0.61	0.56	0.51	
-20	1.24	1.22	1.23	1.22	1.18	1.13	1.08	1.03	0.98	0.94	0.89	0.84	0.79	0.74	0.68	0.62	0.57	0.51	
-10	1.27	1.30	1.26	1.21	1.19	1.16	1.12	1.08	1.03	0.98	0.92	0.87	0.81	0.76	0.69	0.63	0.57	0.51	
0	1.30	1.30	1.29	1.27	1.25	1.21	1.16	1.12	1.06	1.01	0.95	0.89	0.83	0.77	0.70	0.63	0.57	0.51	
10	1.27	1.30	1.26	1.21	1.19	1.16	1.12	1.08	1.03	0.98	0.92	0.87	0.81	0.76	0.69	0.63	0.57	0.51	
20	1.24	1.22	1.23	1.22	1.18	1.13	1.08	1.03	0.98	0.94	0.89	0.84	0.79	0.74	0.68	0.62	0.57	0.51	
30	1.18	1.15	1.14	1.14	1.13	1.09	1.04	0.99	0.94	0.89	0.85	0.80	0.76	0.71	0.66	0.61	0.56	0.51	
40	1.10	1.08	1.05	1.04	1.03	1.01	0.99	0.94	0.90	0.85	0.80	0.75	0.72	0.68	0.64	0.60	0.55	0.51	
50	0.99	0.97	0.95	0.94	0.93	0.92	0.91	0.88	0.84	0.80	0.75	0.71	0.67	0.64	0.61	0.58	0.54	0.51	
60	0.88	0.86	0.84	0.82	0.82	0.82	0.81	0.80	0.77	0.73	0.69	0.66	0.63	0.60	0.58	0.56	0.53	0.51	
70	0.76	0.75	0.73	0.71	0.71	0.70	0.70	0.70	0.69	0.66	0.64	0.60	0.57	0.56	0.55	0.54	0.52	0.51	
80	0.63	0.62	0.61	0.59	0.59	0.59	0.60	0.60	0.60	0.58	0.56	0.54	0.52	0.51	0.51	0.51	0.51	0.51	
90	0.50	0.49	0.48	0.47	0.47	0.48	0.49	0.50	0.51	0.50	0.49	0.48	0.47	0.47	0.48	0.49	0.50	0.51	
100	0.37	0.37	0.36	0.35	0.36	0.37	0.39	0.40	0.42	0.41	0.41	0.41	0.41	0.43	0.45	0.47	0.49	0.51	
110	0.04	0.05	0.08	0.12	0.17	0.22	0.26	0.30	0.32	0.33	0.34	0.36	0.37	0.38	0.41	0.45	0.48	0.51	
120	0.02	0.02	0.02	0.02	0.02	0.05	0.08	0.14	0.18	0.23	0.26	0.29	0.31	0.36	0.39	0.42	0.47	0.51	
130	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.03	0.04	0.06	0.14	0.23	0.27	0.32	0.37	0.41	0.46	0.51	
140	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.10	0.24	0.29	0.34	0.40	0.45	0.51	
150	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.16	0.27	0.33	0.39	0.45	0.51	
160	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.07	0.26	0.32	0.39	0.44	0.51	
170	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.26	0.31	0.38	0.44	0.51	
180	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.26	0.32	0.38	0.44	0.51	

C Range: 0 - 180DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:DAMIN  
Test Date:2026-04-08

γ Range: 0 - 180DEG  
γ Interval: 2.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.490  
Humidity:65.0%  
Test Distance:8.555m [K=1.0000]  
Remarks: